


Ni-MH Battery Rechargeable

■ CELL CONSTRUCTIONS

Cylindrical type battery

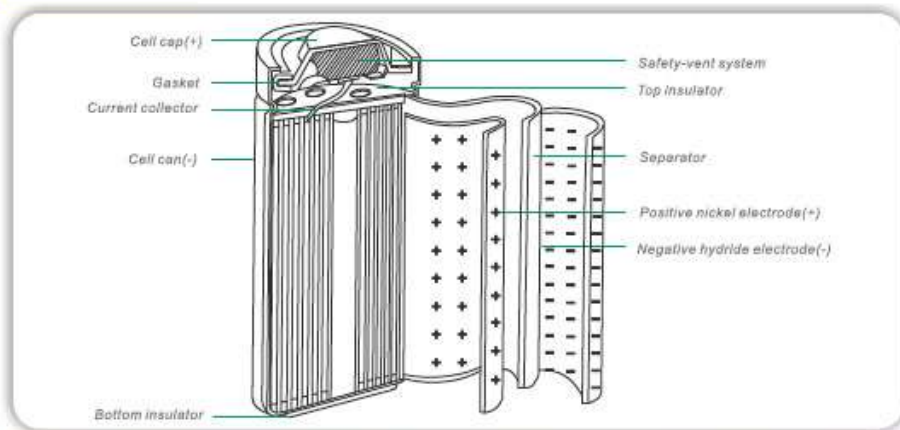

■ MAIN FEATURES

- Excellent discharge characteristics
- Green power
- High energy density
- Long shelf life
- Cycle life equivalent to 500 charge and discharge cycles
- Fast charge in approx. 1.2 hours

■ APPLICATIONS

- Communication devices , such as cordless telephone, mobile phone, interphone .
- Audio and video equipments , such as portable camcorder, Walkman, MD, DVD, DVD, TV.
- Information devices , such as notebook, PDA, portable facsimile apparatus.
- Household appliances , such as electric shaver, electric toothbrush, massage device, portable vacuum cleaner.
- Metering instrument.
- Emergency light and security system.
- Electric toys.
- Electric tools.



CYLINDRICAL TYPE

Model	Size	Nominal Voltage (V)	Nominal Capacity (mAh)	Standard Charge		Fast Charge		Diameter (mm)	Height (mm)	Approx. Weight(g)
				Current (mA)	Time (hrs)	Current (mA)	Time (mins)			
NH-1/3AAA180	1/3AAA	1.2	180	18	16	90	138	10.1	15	4
NH-1/3AAA200	1/3AAA	1.2	200	20	16	100	144	10.1	15	4
NH-2/3AAA300	2/3AAA	1.2	300	30	16	300	75	10.1	28.5	8
NH-AAA600	AAA	1.2	600	60	16	600	75	10.1	43.1	12
NH-AAA700	AAA	1.2	700	70	16	700	75	10.1	43.1	11
NH-AAA800-T	AAA	1.2	800	80	16	400	150	10.1	44.2	13
NH-AAA900-T	AAA	1.2	900	90	16	450	150	10.1	44.2	13
NH-1/2AA600	1/2AA	1.2	600	60	16	600	75	14.1	23.8	13
NH-2/3AA600	2/3AA	1.2	600	60	16	600	75	14.1	29.0	14
NH-4/5AA700	4/5AA	1.2	700	70	16	700	75	14.1	42.8	14
NH-4/5AA1100	4/5AA	1.2	1100	110	16	1100	75	14.1	42.8	21
NH-AA1000	AA	1.2	1000	100	16	1000	75	14.0	48.5	24
NH-AA1800	AA	1.2	1800	180	16	900	150	14.0	48.5	28
NH-AA2200	AA	1.2	2200	220	16	1100	150	14.0	48.5	31
NH-AA2300-T	AA	1.2	2300	230	16	1150	150	14.2	50	31
NH-AA2500-T	AA	1.2	2500	250	16	500	420	14.2	50	32
NH-A2200	A	1.2	2200	220	16	1100	144	16.5	48.6	33
NH-4/3A3700	4/3A	1.2	3700	370	16	1850	144	16.5	66.7	47
NH-4/3A3800	4/3A	1.2	3800	380	16	1900	144	16.5	66.7	48
NH-SC2200	SC	1.2	2200	220	16	1100	150	22.9	42.5	51
NH-SC2500	SC	1.2	2500	250	16	1250	144	22.5	43.0	50
NH-SC2800	SC	1.2	2800	280	16	1400	150	22.1	42.5	59
NH-SC3000	SC	1.2	3000	300	16	1500	150	22.1	42.5	60
NH-SC3300	SC	1.2	3300	330	16	1650	150	22.1	42.5	62
NH-SC3500	SC	1.2	3500	350	16	1750	150	22.1	42.5	66
NH-C2600	C	1.2	2600	260	16	1300	150	25.2	49.5	42
NH-C2800	C	1.2	2800	280	16	1400	150	25.2	49.5	55
NH-C3000	C	1.2	3000	300	16	1500	144	25.2	49.5	61
NH-C3500	C	1.2	3500	350	16	1750	150	25.2	49.5	66
NH-C4000	C	1.2	4000	400	16	2000	150	25.2	49.5	73
NH-C4500-T	C	1.2	4500	450	16	2250	150	25.2	50.5	80
NH-D5000	D	1.2	5000	500	16	2500	150	32.2	59.5	106
NH-D8000	D	1.2	8000	800	16	4000	150	32.2	61.2	170
NH-D9000-T	D	1.2	9000	900	16	4500	150	32.2	61.2	175
NH-F13000	F	1.2	13000	1300	16	2600	420	32.2	88.6	220
NH-F14000	F	1.2	14000	1400	16	2800	420	32.2	88.6	230

Remark: "T" stands for high cap

PRISMATIC TYPE

Model	Nominal Voltage (V)	Nominal Capacity (mAh)	Standard Charge		Fast Charge		Length (mm)	Width (mm)	Thickness (mm)	Approx. Weight(g)
			Current (mA)	Time (hrs)	Current (mA)	Time (mins)				
NH-9V160	8.4	160	16	16	30	420	26.5	17.5	48.5	33
NH-9V180	8.4	180	18	16	36	420	26.5	17.5	48.5	42
NH-9V200	8.4	200	20	16	40	420	26.5	17.5	48.5	42
NH-9V250	8.4	250	25	16	50	420	26.5	17.5	48.5	42

Available Terminals For button battery

